



Automation systems for sliding gates of up to 3.500 kg

BY 3500T

All the power and total safety needed

The solution for sliding gates that completes the CAME product range. State-of-the-art technology provides maximum resistance to wear and total safety.



BY3500T

CAME reliability
to the maximum
power

BY3500T is the model which mostly extols the characteristics of resistance, reliability and power because it goes beyond mere industrial application. It is the ideal solution for powering exceptionally heavy gate leaves of up to 3.500 Kg.



The electronics

Besides the normal command and safety functions, the new electronics supplied with the BZ series provides certain special features which enables total control of the automated unit and optimal service, such as:

> Programming the command for partial opening of the gate leaf: Ideal for all entrances lacking a pedestrian gate.

> Safety even when the gate is not moving: Each command is overridden if an obstruction is detected by the safety devices.

> Gate stopping directly from the radio transmitter: For an always handy control of the gate movement.

The models

BY3500T Automation system with 230V-400V three-phase gearmotor.




The drawing force. The TRIPHASE voltage power supply to the unit ensures intensive service even under the harshest of working conditions such as armoured gates or hangar doors.

Total auto-control. Before actually opening or closing the gate, the electronics checks the proper functioning of all of the system's safety devices.



Easier and safer operation even at night and in dimly lit areas. BY3500T is fitted to connect a lamp which turns on for a few minutes upon each command. Once the time is elapsed the lamp turns off automatically.


Dimensions:



Műszaki adatok:

Típus	BY3500T
Védelmi szint	IP54
Tápfeszültség	230V/400V (50/60 Hz three-phase)
Motor tápfeszültség	230V/400V (50/60 Hz three-phase)
Áramfelvétel	2A
Teljesítmény	750W
Sebesség	10,5 m/min
Üzemhányad	50%
Nyomaték	3.500N
Működési hőmérséklet	-20°C min. +55°C max.

Standard installation:

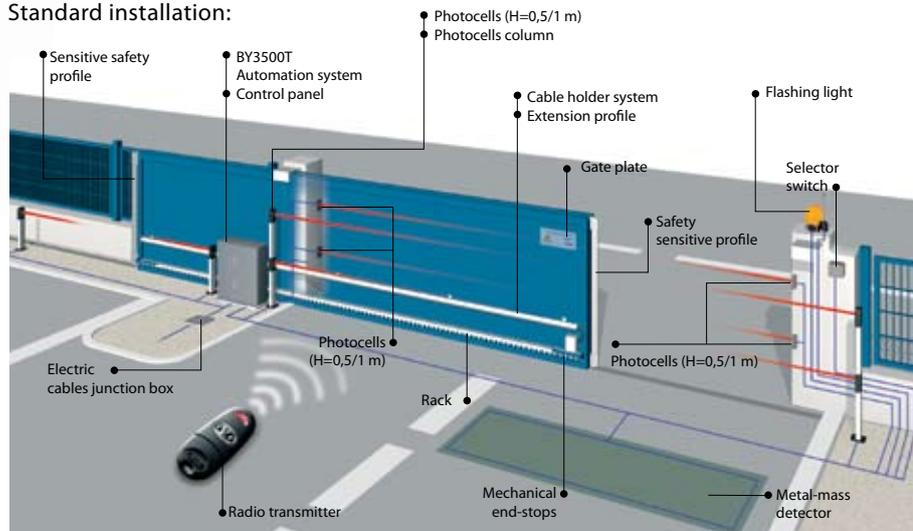

In the event a careful analysis of the automated gate's risks were to require it, the use of sensitive safety infrared or contact profiles becomes indispensable.

PRODOTTI
CE



Came
cancelli automatici
s.p.a.

via Martiri della Libertà, 15
31030 Dosson di Casier - Treviso - Italy

www.came.it - info@came.it

